


Specifications for SMD type

1. Part number system

1	6	S	V	P	3	R	3	M																																																	
Rated voltage		Series name			Rated capacitance			Capacitance tolerance																																																	
↓		↓			↓			↓																																																	
<table border="1" style="width: 100%; text-align: center;"> <thead> <tr><th>Rated volt.</th><th>Code</th></tr> </thead> <tbody> <tr><td>2.5</td><td>2R5</td></tr> <tr><td>4.0</td><td>4</td></tr> <tr><td>6.3</td><td>6</td></tr> <tr><td>10</td><td>10</td></tr> <tr><td>16</td><td>16</td></tr> <tr><td>20</td><td>20</td></tr> <tr><td>25</td><td>25</td></tr> <tr><td>35</td><td>35</td></tr> </tbody> </table>		Rated volt.	Code	2.5	2R5	4.0	4	6.3	6	10	10	16	16	20	20	25	25	35	35	<table border="1" style="width: 100%; text-align: center;"> <tbody> <tr><td>SVP series</td></tr> <tr><td>SVQP series</td></tr> <tr><td>SVPA series</td></tr> <tr><td>SVPB series</td></tr> <tr><td>SVPC series</td></tr> <tr><td>SVPD series</td></tr> <tr><td>SVPS series</td></tr> <tr><td>SVPE series</td></tr> <tr><td>SVPF series</td></tr> </tbody> </table>			SVP series	SVQP series	SVPA series	SVPB series	SVPC series	SVPD series	SVPS series	SVPE series	SVPF series	<table border="1" style="width: 100%; text-align: center;"> <thead> <tr><th>Rated cap.(μF)</th><th>Code</th></tr> </thead> <tbody> <tr><td>3.3</td><td>3R3</td></tr> <tr><td>4.7</td><td>4R7</td></tr> <tr><td>10</td><td>10</td></tr> <tr><td>22</td><td>22</td></tr> <tr><td>100</td><td>100</td></tr> <tr><td>220</td><td>220</td></tr> <tr><td>470</td><td>470</td></tr> <tr><td>1,500</td><td>1,500</td></tr> </tbody> </table>			Rated cap.(μ F)	Code	3.3	3R3	4.7	4R7	10	10	22	22	100	100	220	220	470	470	1,500	1,500	<table border="1" style="width: 100%; text-align: center;"> <thead> <tr><th>Cap. tolerance</th><th>Code</th></tr> </thead> <tbody> <tr><td>$\pm 20\%$</td><td>M</td></tr> </tbody> </table>	Cap. tolerance	Code	$\pm 20\%$	M
Rated volt.	Code																																																								
2.5	2R5																																																								
4.0	4																																																								
6.3	6																																																								
10	10																																																								
16	16																																																								
20	20																																																								
25	25																																																								
35	35																																																								
SVP series																																																									
SVQP series																																																									
SVPA series																																																									
SVPB series																																																									
SVPC series																																																									
SVPD series																																																									
SVPS series																																																									
SVPE series																																																									
SVPF series																																																									
Rated cap.(μ F)	Code																																																								
3.3	3R3																																																								
4.7	4R7																																																								
10	10																																																								
22	22																																																								
100	100																																																								
220	220																																																								
470	470																																																								
1,500	1,500																																																								
Cap. tolerance	Code																																																								
$\pm 20\%$	M																																																								

2. Taping


2-1. Carrier tape

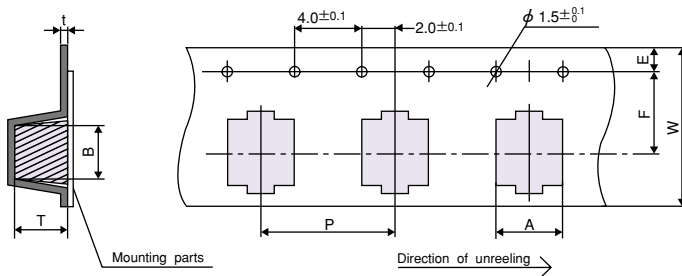


(unit : mm)

Dimension Size code	A	B	W	F	E	P	t	T
A5	4.7 ± 0.2	4.7 ± 0.2	12.0 ± 0.3	5.5 ± 0.1	1.75 ± 0.1	8.0 ± 0.1	0.4 ± 0.1	5.8 ± 0.2
B6	5.6 ± 0.2	5.6 ± 0.2	16.0 ± 0.3	7.5 ± 0.1	1.75 ± 0.1	8.0 ± 0.1	0.4 ± 0.1	6.2 ± 0.2
C45	6.9 ± 0.2	6.9 ± 0.2	16.0 ± 0.3	7.5 ± 0.1	1.75 ± 0.1	12.0 ± 0.1	0.4 ± 0.1	5.3 ± 0.2
C5	6.9 ± 0.2	6.9 ± 0.2	16.0 ± 0.3	7.5 ± 0.1	1.75 ± 0.1	12.0 ± 0.1	0.4 ± 0.1	5.3 ± 0.2
C55	6.9 ± 0.2	6.9 ± 0.2	16.0 ± 0.3	7.5 ± 0.1	1.75 ± 0.1	12.0 ± 0.1	0.4 ± 0.1	6.2 ± 0.2
C6	6.9 ± 0.2	6.9 ± 0.2	16.0 ± 0.3	7.5 ± 0.1	1.75 ± 0.1	12.0 ± 0.1	0.4 ± 0.1	6.2 ± 0.2
E7	8.6 ± 0.2	8.6 ± 0.2	24.0 ± 0.3	11.5 ± 0.1	1.75 ± 0.1	12.0 ± 0.1	0.4 ± 0.1	7.2 ± 0.2
F8	10.7 ± 0.2	10.7 ± 0.2	24.0 ± 0.3	11.5 ± 0.1	1.75 ± 0.1	16.0 ± 0.1	0.4 ± 0.1	8.2 ± 0.2
E12	8.6 ± 0.2	8.6 ± 0.2	24.0 ± 0.3	11.5 ± 0.1	1.75 ± 0.1	16.0 ± 0.1	0.5 ± 0.1	12.3 ± 0.2
F12	10.7 ± 0.2	10.7 ± 0.2	24.0 ± 0.3	11.5 ± 0.1	1.75 ± 0.1	16.0 ± 0.1	0.4 ± 0.1	13.0 ± 0.2

2-2. Reel

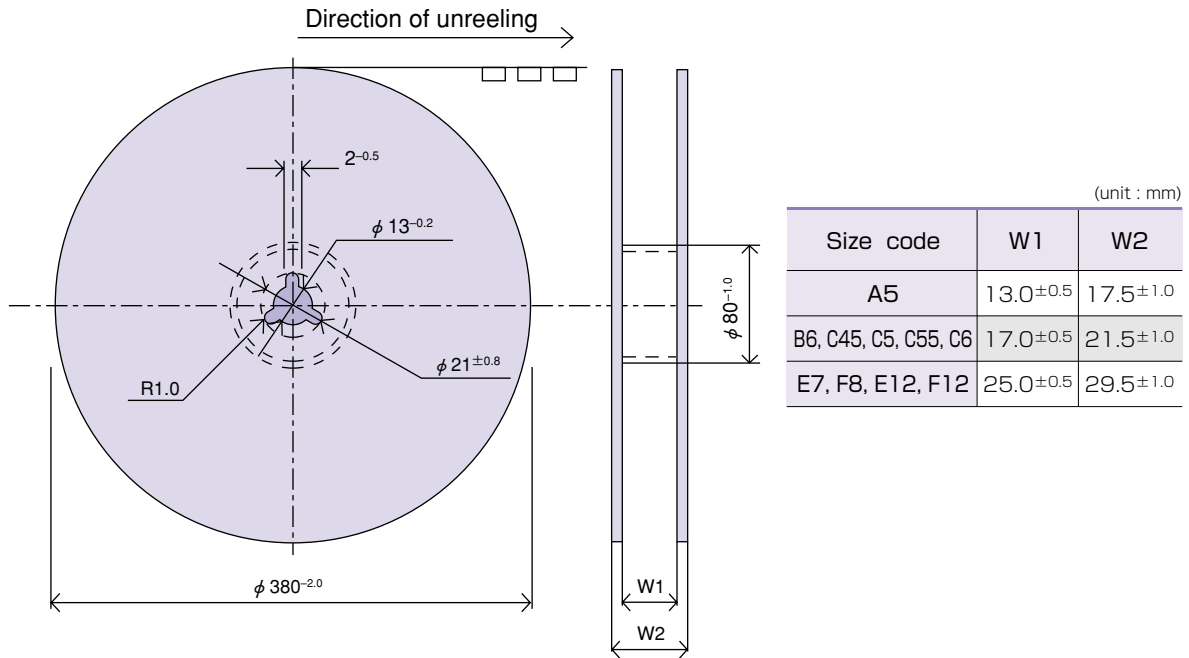

2-3. Polarity



3. Minimum packing quantity

Taping type

Size code	pcs./Reel ($\phi 380$)
A5	2,000
B6	1,500
C45	1,300
C5	1,300
C55	1,000
C6	1,000
E7	1,000
F8	500
E12	400
F12	400